


STOVAX

NEW STOCKTON HIGH OUTPUT BOILER STOVES

- Four models capable of running heating systems up to 62,000BTUs, including new Stockton 14
- Use alone or link to conventional oil or gas central heating, gas or oil sealed heating systems, combi boilers, underfloor heating and even solar panels to provide flexible and cost-effective solutions
- Stovax produces a 'link up' guide showing typical arrangements and covering some frequently asked questions. This can be downloaded from www.stovax.com.
- All Stovax HB boiler stoves are designed for multi-fuel use and incorporate a riddling grate. They can also burn a combination of smokeless fuels and logs together.
- However, if woodburning only is your preference, you can still achieve good performance by incorporating the optional log tray.

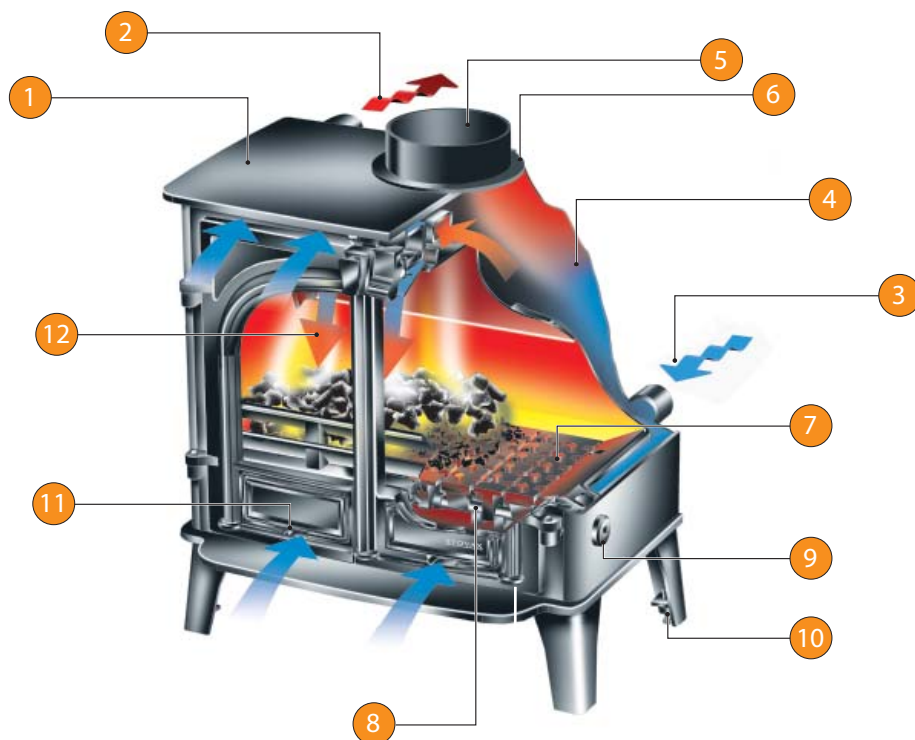

Design Features

1. 5mm and 10mm heavy duty steel body.
2. Excellent heat output to water when burning solid fuels or wood.
3. 4 x 1" BSP boiler tapings for flexible efficient connection to your hot water circuits.
4. Extensive water jacket on 4 sides of stove to ensure maximum transmission of heat to water.
5. Highly developed boiler flue baffle system to ensure maximum heating efficiency.
6. Top or rear flue exit.
7. Specially designed reciprocating grate ensures effective removal of ashes.
8. Large ash collection tray.
9. Discrete external riddling socket.
10. Leveling system in each foot to ensure complete stability on uneven surfaces.
11. Primary air controls to manually adjust the running temperatures.
12. Airwash helps to keep the glass clear and to control the running temperature when burning wood.
13. Optional thermostatic control to maintain desired running temperatures. *(not illustrated)*
14. Optional wood burning tray for improved performance when burning logs. *(not illustrated)*

STOVAX

NEW STOCKTON HIGH OUTPUT BOILER STOVES

Key Facts

	7HBi	8HB	11HB	14HB
Multi-fuel with external riddling	✓	✓	✓	✓
Airwash	✓	✓	✓	✓
Nominal heat output to room	4.0kW	4.9kW	7.0kW	7.0kW
Nominal heat output to boiler	7.4kW	8.2kW	11.0kW	15.0kW
Maximum system rating	8.8kW (30,000BTU)	10kw (34,000BTU)	13kw (45,000BTU)	18kw (62,000BTU)
Example: No. of 2500BTU radiators + 8000BTU cylinder	8 radiators	9 radiators	15 radiators	19 radiators
Maximum log length	12¾" (325mm)	15¾" (400mm)	19½" (500mm)	23½" (600mm)
Optional log tray	✓	✓	✓	✓
Flue outlet	5" top	6" top or rear	6" top or rear	6" top or rear
Choice of four colours	✓	✓	✓	✓
Optional thermostat	✓	✓	✓	✓

Product Codes

Colour	Metallic Blue	Metallic Brown	Metallic Green
7HBi – low canopy	7125HBBL	7125HBBR	7125HBGR
Optional log tray for 7HBi	7125WT	7125WT	7125WT
Optional thermostat	STATIN	STATIN	STATIN

8HB	7113HBBL	7113HBBR	7113HBGR
Optional log tray for 8HB	7113WT	7113WT	7113WT
Optional thermostat	STATST	STATST	STATST

11HB	7116HBBL	7116HBBR	7116HBGR
Optional log tray for 11HB	7116WT	7116WT	7116WT
Optional thermostat	STATST	STATST	STATST

14HB	7314HBBL	7314HBBR	7314HBGR
Optional log tray for 14HB	7314WT	7314WT	7314WT
Optional thermostat	STATST	STATST	STATST